




Bay Architects
 18201 Gulf Freeway
 Post Office Box 891209
 Houston, Texas 77289
 Tel 281.286.6605
 Fax 281.286.9606

ADDENDUM NO. 10
 March 22, 2010

Project: Center of Hope
 The Salvation Army

Prepared by: Bay Architects, Inc.
 18201 Gulf Freeway
 Webster, Texas 77598
 Post Office Box 891209
 Houston, Texas 77289
 (281) 286-6605

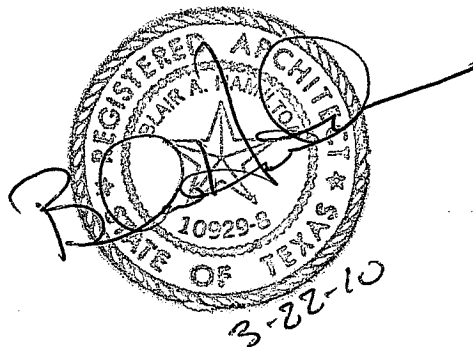

Bay Project No.: 0734

Prepared for: Prospective Proposers

PART A NOTICE TO PROPOSERS

01. Receipt of this Addendum shall be acknowledged on the Proposal Form. Failure to do so may subject Proposers to disqualification. Each Proposer shall make necessary adjustments and submit his proposal with full knowledge of all modifications, clarification, and supplemental data included therein.
02. This Addendum forms part of the Contract Documents and shall be incorporated integrally therewith. Where provisions of the following supplemental data differ from those of previously issued documents, this Addendum shall govern.
03. The following Contract Documents have been issued to date delineating the Work (Project):

Construction Documents	February 17, 2010
Addendum 01	March 1, 2010
Addendum 02	March 3, 2010
Addendum 03	March 4, 2010
Addendum 04	March 10, 2010
Addendum 05	March 15, 2010
Addendum 06	March 17, 2010
Addendum 07	March 17, 2010
Addendum 08	March 18, 2010
Addendum 09	March 19, 2010
04. This Addendum consists of ADD10-1 through ADD10-2.

PART B GENERAL INFORMATION
"Any changes to prior issued addendum materials are listed here."

PART C TABLE OF CONTENTS

05. None.

PART D CHANGES TO THE PROJECT MANUAL

06. Section 12510 – Horizontal Blinds
a. Page two, Article 3.1 paragraph A, revise to read as follows:
“A Install blinds at all exterior windows fitted between vertical mullions in accordance with manufacturer’s installation procedures, except as otherwise specified herein.”
07. Section 15330 – Fire Protection Systems
a. Modify paragraph 2.01 to refer to the proposed system as a ‘Wet Pipe Sprinkler System’. Delete all references to a ‘Dry’ pipe.
b. Delete paragraph 2.11 in its entirety.

PART E CHANGES TO THE DRAWINGS

08. C1.02 Site Plan
a. The parking and driveways on the southeast side and all other parking spaces shall be 5” thick and reinforced as shown on chart 19/C1.03. Driveways and loading dock back-up areas shall be 6” and reinforced as shown on chart 19/C1.03.

PART F NEW ISSUED DRAWING SHEETS

09. None.

PART G RE-ISSUED DRAWING SHEETS

10. None.

END OF ADDENDUM